

460w~480w

M10 solar modules Aquaman series
Mono MBB **N-type** large size half cut module


Excellent technical advantages and system design scheme to achieve high reliability, power generation effective gain and EPC cost reduction. Products can match different installation conditions, taking into account high adaptability and high compatibility. With mature support and inverter scheme, customized design for industrial and commercial and centralized ground power stations.

MODULE CHARACTER

-  PID Resistance
-  Salt mist resistance/Ammonia resistance /dust and hail resistance
-  Production process reliability test
-  0~+5W Positive Tolerance
-  Mono MBB half cut
-  Reduce BOS cost increase ROI
-  Non-destructive cutting

CERTIFICATION

- IEC61215/IEC61730
- ISO9001:Quality Management System
- ISO14001:Environmental Management System
- ISO45001:Occupational Health and Safety Management System

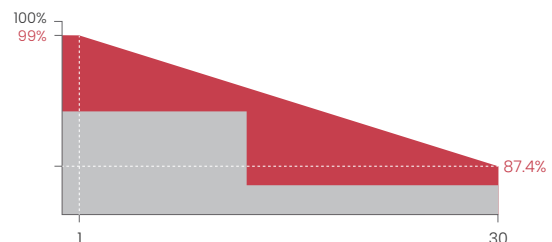

Linear performance warranty



Product warranty



Module Type	SR-60M460NHLPro		SR-60M465NHLPro		SR-60M470NHLPro		SR-60M475NHLPro		SR-60M480NHLPro	
Module Efficiency (%)	21.28		21.52		21.75		21.98		22.21	
Tolerance (W)	0 ~ +5		0 ~ +5		0 ~ +5		0 ~ +5		0 ~ +5	
Test Environment	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power Pmax(W)	460	347.0	465	350.8	470	354.6	475	358.3	480	362.1
Open Circuit Voltage	41.96	40.08	42.18	40.29	42.40	40.5	42.62	40.71	42.83	40.91
Short Circuit Current I _{sc} (A)	14.02	11.32	14.10	11.38	14.17	11.44	14.26	11.51	14.33	11.57
Maximum Power Voltage	34.67	32.53	34.85	32.7	35.03	32.87	35.21	33.04	35.39	33.21
Maximum Power Current	13.27	10.7	13.35	10.77	13.42	10.82	13.5	10.89	13.57	10.94
Cell Type (mm)	MBB-Mono-Crystalline Silicon									
Number of Cells (Pcs)	120(6×20)									
Maximum System Voltage	DC1500									
Temp.Coeff.of Voc (%/°C)	-0.249									
Temp.Coeff.of Isc (%/°C)	0.045									
Temp.Coeff.of Pm (%/°C)	-0.3									
Operating Temperature	-40 to 85									
Nominal Operating Cell Temperature(NOCT)	45±2									
Max.Series Fuse (A)	25									
Pressure Bearing (Pa)	5400									
Wind Bearing (Pa)	2400									

STC: Irradiance 1000W/m², Cell temperature 25°C, AM1.5
 NOCT: Irradiance 800W/m², Ambient temperature 20°C, Wind speed 1m/s


MATERIAL DETAILS

Frame	Anodized aluminum	Glass	3.2mm low-iron tempered suede glass
Cell	6×20pcs mono solar cell	Junction Box	IP≥68, TÜV & UL
Diode quantity	3	Cable&Connector	4mm ² , EVO2 or EVO2 compatible
Net length of Cable	350mm or as customer's requirements		


PACKING DETAILS

Dimension	1908×1133×30mm	Weight	22.4kg
Loading Capacity	864pcs/40HC	Packing	36pcs/pallet


ENGINEERING DRAWINGS

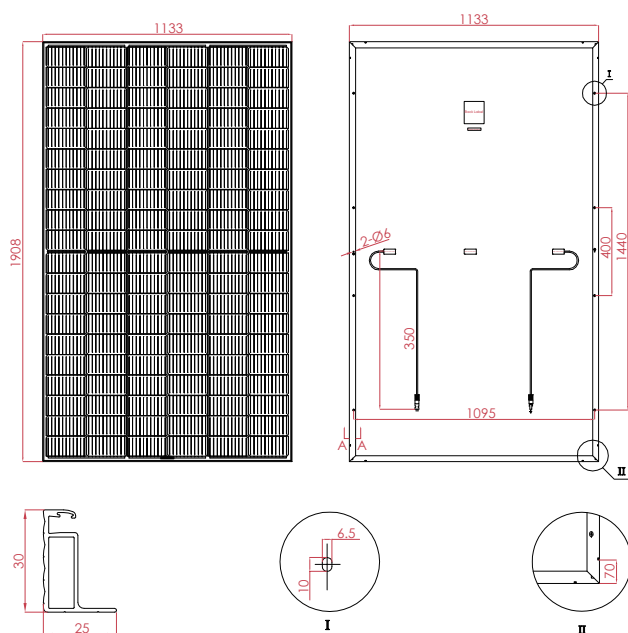

IV CURVES

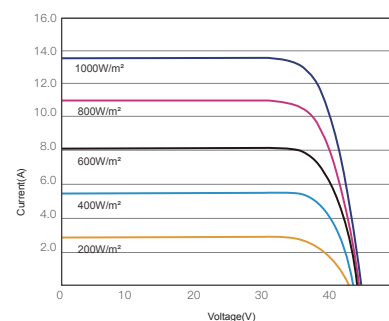

I-V CURVES OF PV MODULE(475W)

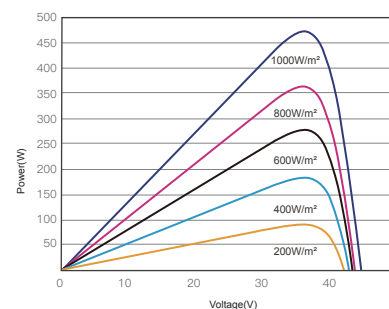

P-V CURVES OF PV MODULE(475W)