

# Hitouch 5N

HN18N-72H

570-590W

## TOPCon

High Efficiency Module

22.84%

Maximum Efficiency

12 YEARS

Product Warranty



### Higher Power Output

Higher module conversion efficiency benefit from bigger wafer and half-cell structure.

MBB technology enhances current collection with lower series resistance.



### Excellent Temperature Coefficient

Lower operating temperature and temperature coefficient increases the power output.



### Long-Term Reliability

Module certified to withstand extreme wind (2400 Pascal) and snow loads (5400 Pascal).

Excellent anti-PID performance to guarantee a better sustainability in harsh environment.




### Lower Hot Spot and Crack Risk

Reduce hot-spot risk with optimized electrical design and lower operating current.

Reduce crack risk by MBB solar cell design.

### Power Warranty

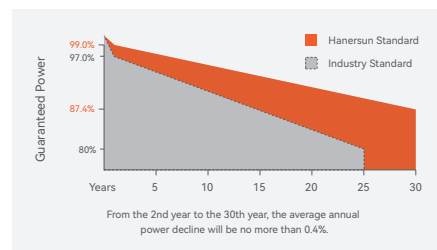

12-year product warranty



30-year linear power output warranty

### Comprehensive Certificates

IEC 61215-1:2016, IEC 61215-1-1:2016  
IEC 61215-2:2016, IEC 61730-1:2016  
IEC 61730-2:2016



### About Hanersun

Hanersun is a world-leading energy technology company, with a business scope from the R&D and intelligent manufacturing of solar modules, energy storage products, to comprehensive energy solutions.

\* This version datasheet applies to Suntastic.Solar Handels GmbH only.

**Electrical Characteristics**

Module Type	HN18N-72H570W		HN18N-72H575W		HN18N-72H580W		HN18N-72H585W		HN18N-72H590W	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power (Pmax)	570	432	575	436	580	440	585	445	590	449
Maximum Power Voltage (Vmp)	42.80	40.20	43.00	40.40	43.20	40.60	43.40	40.80	43.60	41.00
Maximum Power Current (Imp)	13.32	10.74	13.38	10.79	13.43	10.84	13.48	10.91	13.54	10.96
Open-circuit Voltage (Voc)	51.00	48.70	51.20	48.90	51.40	49.10	51.60	49.30	51.80	49.50
Short-circuit Current (Isc)	14.11	11.38	14.17	11.42	14.23	11.47	14.29	11.53	14.35	11.59
Module Efficiency(%)	22.07%		22.26%		22.45%		22.65%		22.84%	

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5.  
 \*Measuring tolerance: 0 ~ +5W

NMOT: Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s.

**Mechanical Parameters**

Solar Cells	Monocrystalline (182mm)
No. of Cells	144 [2 x (12 x 6) ]
Module Dimensions	2278*1134*30mm
Weight	28.5kg
Glass	3.2mm, High Transmission, AR Coated Heat Strengthened Glass
Encapsulant Material	EVA/POE
Backsheet	White
Frame	Anodized Aluminium Alloy
J-Box	IP68
Output Cable	4.0mm <sup>2</sup>
(Including Connector)	Length Portrait:1200/1200mm
Connector	MC4 Original

**Temperature Ratings**

NMOT (Nominal operating cell temperature)	42°C(±2°C)
Temperature Coefficient of Pmax	-0.310%/°C
Temperature Coefficient of Voc	-0.260%/°C
Temperature Coefficient of Isc	+0.046%/°C

(Do not connect Fuse in Combiner Box with two or more strings in parallel connection)


**Packaging**

Pcs per Pallet: 36  
 Pcs per 40' HC: 720


**Operating Parameters**

Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500V DC (IEC)
Maximum Series Fuse Rating	30A
Bifacility	/

**Dimensions (Unit: mm)**

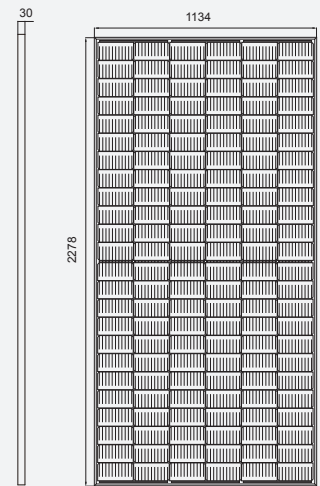


Front View

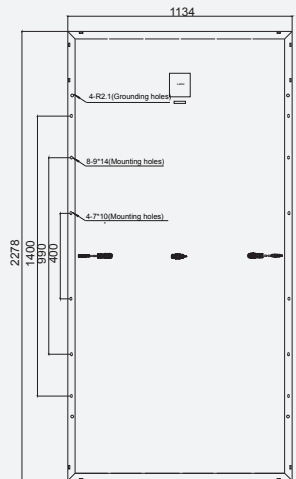

Back View

**I-V Curves of PV Module (580W)**

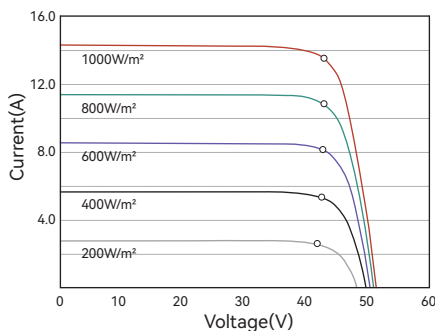

**P-V Curves of PV Module (580W)**

